

CPC-C-40



CE

- capacitive level meters
- for continuous level measurement of diesel fuel in trucks, building machines, locomotives, etc.
- direct mounting into a tank through the 5-hole flange
- arbitrary electrode length (max. 1 m)
- possibility of shortening electrodes to the desired length
- current (4...20 mA) or voltage (0...10 V) output or communication protocol CAN
- setting by means of magnetic pen


Capacitive level meter **CPC-C-40** is intended for continuous measurement of the level of fuel (diesel). It consists of a measuring electrode and the electronics housing to which is firmly attached the cable. The electronic part converts the capacity to the current or voltage signal. For accurate measurements independent on the tank shape is the rod electrode placed inside the reference tube.

The level meter has no setting elements, neither mechanical moving parts and so its installation is very simple. The production of its electrodes is possible in any length in the range from 100 to 1000 mm, so that the level meter can go through entire height of the tank. Mounting of the tank level meter is done by using 5-hole flange (SAE).


VARIANTS OF LEVEL METERS

CPC-C-40N-40 **non-insulated bar electrode with reference tube** for level measurement of diesel fuel. Setting by means of magnetic pen. Possibility of shortening electrodes to the desired length in the range from 0,1 to 1 m.

DIMENSION DRAWINGS

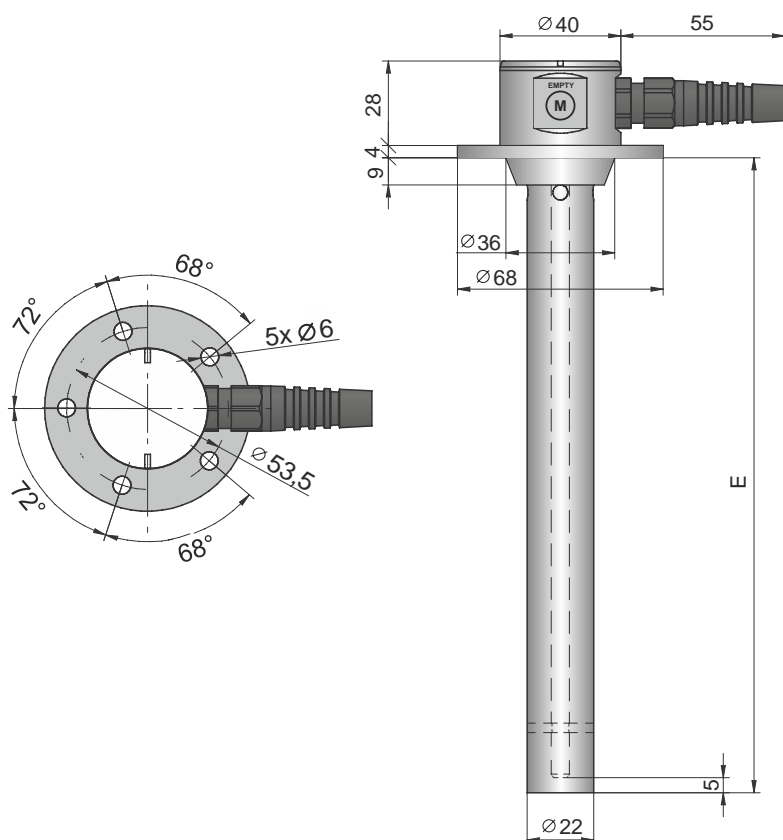

Variant "F5" – flange with 5 holes

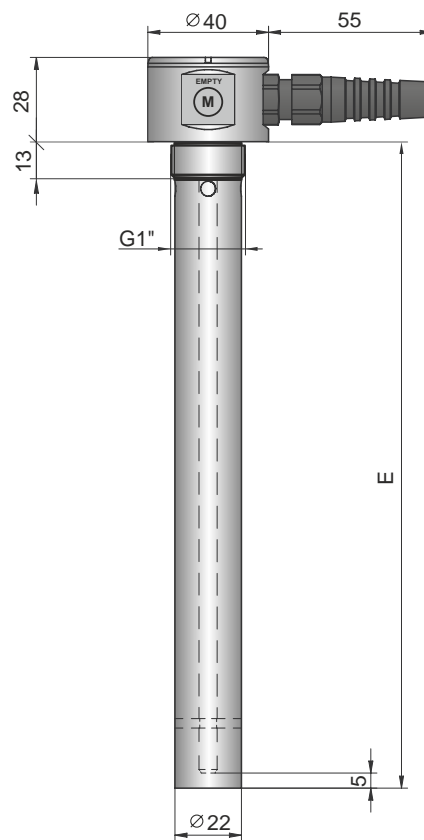

Variant "G1" – thread G 1"

Technical specification		
Supply voltage	CPC-C-40N-40-_-I CPC-C-40N-40-_-U CPC-C-40N-40-_-CAN	9 ... 30 V DC 12 ... 30 V DC 9 ... 30 V DC
Type of Output	CPC-C-40N-40-_-I CPC-C-40N-40-_-U CPC-C-40N-40-_-CAN	4 ... 20 mA (limits 3,9 ... 20,5 mA) 0 ... 10 V (limits 0 ... 10,2 V) Protocol CAN SAE j1939 (FMS)
Current consumption	CPC-C-40N-40-_-I CPC-C-40N-40-_-U CPC-C-40N-40-_-CAN	3,75 ... 20,5 mA Max. 5 mA Typ. 10 mA (Max. 16 mA)
Load resistance	CPC-C-40N-40-_-I CPC-C-40N-40-_-U	R_z (U - 9) / 20,5 [k ; V] R_z 5 k
Nonlinearity		Max. 1 %
Temperature error		Max. 0,05 % / K
Voltage error		Max. 0,3 μ A/V
Internal resistance / Electric strength (Electrode – Housing)		1 M / 200 V DC
Coupling capacity / / Electric strength (Housing – Supply leads)	CPC-C-40N-40-_-I CPC-C-40N-40-_-U CPC-C-40N-40-_-CAN	91 nF / 500 V DC 50 nF / 500 V DC 49 nF / 500 V DC
Coupling capacity / Electric strength (Electrode – Supply leads)		47 nF / 500 V DC
Protection class		IP 68
Ambient temperature range		-40 ... +85°C
Cable	CPC-C-40N-40-_-I CPC-C-40N-40-_-U CPC-C-40N-40-_-CAN	PUR 2x1 mm ² PUR 3x0,75 mm ² PUR 2x2x0,25 mm ² , shielded
Process connection	CPC-C-40N-40-F5-_ CPC-C-40N-40-G1-_ 	Flange with 5 holes Thread G1"
Cable gland	CPC-C-40N-40-_-_-V CPC-C-40N-40-_-_-H	cable gland with spiral relief cable gland for protective hose (AD 10,0)
Weight (exclude electrode)		Approx. 0,3 kg
Error indication Settings	CPC-C-40N-40-_-I CPC-C-40N-40-_-U (0..10 V) CPC-C-40N-40-_-U (0..5 V)	3,75 mA 10,5 V 5,5 V


Material performance	
Sensor part	Standard material
Housing	stainless st. W. Nr. 1.4305 (AISI 303)
Cable gland	PA
Cable	cover PUR, individual wires PVC
Electrode	stainless st. W. Nr. 1.4404 (AISI 316 L)
Reference tube	stainless st. W. Nr. 1.4301 (AISI 304)
Process flange	stainless st. W. Nr. 1.4305 (AISI 303)
Insulating bushing	PA + GF30

INSTALLATION AND RECOMMENDATIONS


- Level meters are installed in vertical position. Mounting of the tank level meter is done by using 5-hole flange (SAE). Distance from the wall may be arbitrary and distance from the bottom is recommended min. 10 mm.
- Under the flange of the level, it is necessary to put in the **rubber gasket** resistant to petroleum products (see. Accessories).
- On the area of contact seals the tank flange is applied **silicone sealant** resistant to petroleum products. It is recommended to apply sealant Gasket seal from SOUDAL or Loctite 5922
- The sensor is mounted with screws M5 5. Recommended **tightening torque** of **5.5 Nm** for the bolts of material type 8.8 (8G).
- Measurement range sensor is adjusted by applying a magnetic pen on sensitive pads (see Instructions). Measuring the level of **other media** (biodiesel, oil, etc.) **must be consulted with the manufacturer** (readjustment of the level meter).
- The level meter can be also used for **similar applications** in stationary tanks, containers, etc




ELECTRICAL CONNECTION



Level meter with current output connection (I)

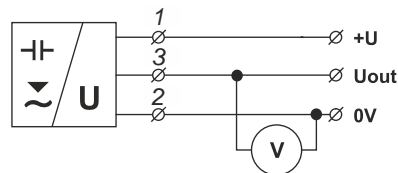

Level meter with voltage output connection (U)

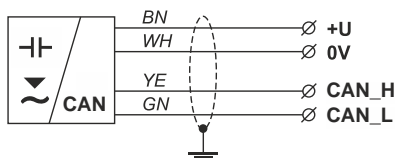

Level meter with CAN line output connection


Wiring colours:

1,2,3 – Nr. of cable
BN – Brown
BU – Blue
WH – White
YE – Yellow
GN – Green
— — Cable shield

AREAS OF APPLICATION

Capacitive level meter **CPC-C-40** is intended for continuous measurement of the level of fuel (diesel) in tanks of trucks, construction and agricultural machinery, locomotives etc. After consultation with the manufacturer can be used for measuring and other non-conductive liquids (eg.: biodiesel, oil, etc.)

ORDER CODE

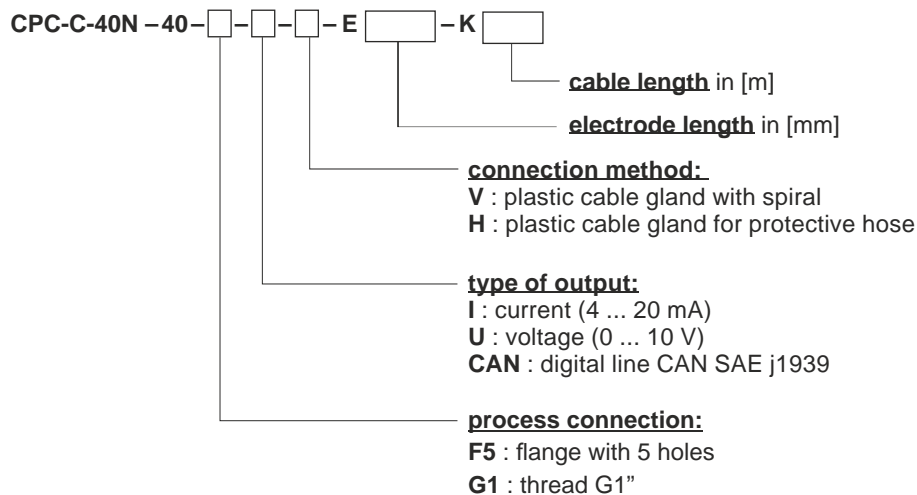

CORRECT SPECIFICATION EXAMPLES

CPC-C-40N-40-F5-I-V-E1000-K5

(N) performance for normal area; (40) rod electrode with reference tube; (F5) flange with 5 holes; (I) current output (4 ... 20 mA); (V) cable gland; (E1000) electrode length 1000 mm, (K5) cable length 5 m

CPC-C-40N-40-G1-CAN-H-E800-K3

(N) performance for normal area; (40) rod electrode with reference tube; (G1) thread G1"; (CAN) digital line CAN; (H) cable gland for protective hose; (E800) electrode length 800 mm, (K3) cable length 3 m

ACCESSORIES

magnetic pen	included in the price	
programme Basic Scada Fuel meter (for CAN version)	free-to-download	
extra cable (over the standard length 2 m)	at extra cost	
rubber seal 5 otv NBR (for flange with 5 holes)	at extra cost	
converter for CAN version	at extra cost	
protective hose (for version with connector H)	at extra cost	

SAFETY, PROTECTIONS AND COMPATIBILITY

Level meter CPC-C-40 is equipped with protection against electric shock on electrode, reverse polarity, output current overload, short circuit and short time over voltages.

Electromagnetic compatibility is provided by conformity with standards: EN 55022/B, EN 61326-1, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6.

